




297 Subh Estste, Nr. Jaweri Estate, Singharwa Kathwada Road, Kathwada, Ahmedabad 382330.

+ 91 9033817316 | www.globalventure.hpage.com | yoga24in@hotmail.com

Roll Slitting and rewinding machine Price 5,00,000/-

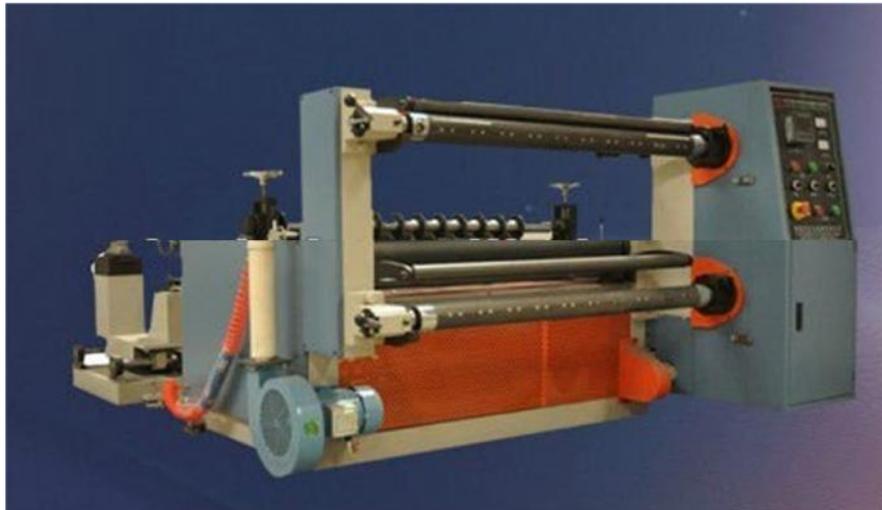

Specifications

Slitting and Rewinding Machine

Slitting and Rewinding Machine

Performance and Characteristics:

--The machine can slit all kinds of printing and packing products such as polythene, plastic film, compound material, single layer aluminium foil, Chinese cypress paper, sweet paper, telegram paper, computer paper, glass paper, cigarette paper, toilet paper and special material etc.

--It adopts PLC control system and meter counter, it adopts magnetic brake and clutch for the material unwinding and rewinding. It adopts two kinds of cutter, round disc cutter for paper, and direct blade for plastic film slitting, It adopts imported frequency inverter for the AC motor control, it is more energy saving and functional stability.

--Equipped with edge position control (EPC) to provide accurate slitting position, which is imported from Germany.

--Equipped with automatic meter counter which will stop the machine when reach the pre-set length.

--Equipped with semi-auto tension controller.

Equipment technical requirements:

1. The microcomputer control, all of the data can be installed in the panel, the machine automatically begin to work.
2. The Emerson frequency conversion motor (7.5 kw) control material conveying.
3. With the German double electric control, used for automatic struggle with edge and make up, to ensure the materials of accurate position. The light and dark in the operation panel direct conversion.
4. Adopt the automatic meter machine, set up after the number of meters, when the machine is set to the numerical machine, automatic stop.
5. Put volumes and rewinder part is equipped with semi-automatic tension controller.
6. Put the brake roll tension 20 Kg/m² x 1 only. The winding tension magnetic powder clutch using (domestic) 10 Kg/m² x 2 only,
7. USES the straight knife and circular knife two cutting way (straight knife used to cut the aluminum foil or film, the narrow cut 10 mm, round blade for paper cutting, cutting the narrow 30 mm).
8. All the driving guide roller through balance correction (dynamic/static treatment).

Device equipped with abrupt stop switch, automatic parking
Equipment equipped with fans and waste edge automatic drain.

The whole equipment requirements:

Equipment whole color: the sky blue

Equipment safety protection in place.

Electrical equipment with domestic famous brand fittings and import parts.

Main Technical:

Model Type	JT-SLT-1300
Max. Parent Web Width	1300mm
Max. Parent Web Diameter	1000mm
Max. Rewinding Diameter	500mm
Min. Slitting Width	Razor Type Blade: 10mm Disc Type Blade: 30mm
Thickness Range	50-800gsm
Max. Machine Speed	180m/min
Unwinding/Rewinding Shaft	3" Pneumatic Air Expanding Shaft
Slitting Precision	±0.15mm