




A 18, 5th Floor, Ajanta Complex, Nr. Income Tax, Ashram Road, Ahmedabad-380014.
+ 91 9033817316 | www.globalventure.hpage.com | yoga24in@hotmail.com

Hot Tyer Remolding Machine Cost: 950000/- INR

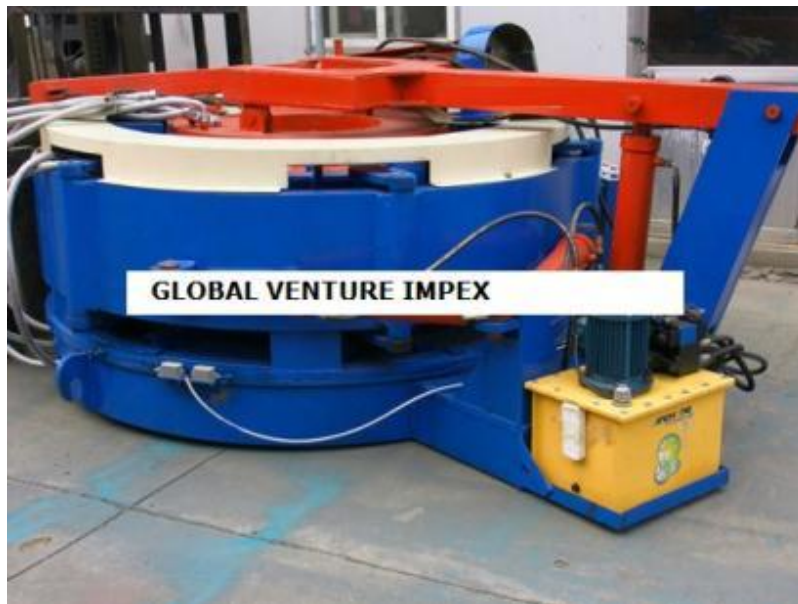

Cold Tyer Remolding Machine Cost: 750000/- INR



Packaging & Delivery

Packaging Detail: safety export packing

Delivery Detail: in 30-40 days after deposit received

Specifications

Hot tire remould machine

1.CE&ISO9001:2000

2. Oil heating way

3.Manual&automatic

Hot tire remould machine

Brief Introduction of Segmented Mold/Mould

1. Has to use together with aluminum or steel mold/mould
2. Oil heating way
3. One set of segmented mold can only suitable for 3 tyre size, and tyre size difference within 10cm.
4. Being used in hot tyre retreading machines

Functions:

1. to make precured tread bond firmly with the old tyre , automatic temperature-controlled, automatic pressure-controlled once exceeding the temperature stipulated
2. Form new tyre patterns, with steel or aluminum mold can print your logo on retread tyres

Hot Tire Retreading Segmented mold *Technical Parameters*

Capable for tire	900-1200R20,11-12R22.5,295/315/80R22.5, 385/65R22.5,1200R24
Total power	2.2KW
External dimensions (L × W × H)	2600×2200×2100(mm)
Weight	4500kg
Curing time	about 150-180min
Temperature	140-150 degrees
Woking pressure	22-26kg
Capacity	Only 1 tyre/shift

Whole Set of Hot Tire Retreading Processing and Machines Recommended Need:

Processing	Machines	Need Level
1. Inspection	Inspection Machine	Must
2. Buffing	Tyre Buffer	Must
3. Dust Collecting	Dust Collector	Must
4. Cementing	Mixing Machine	Must
5. Filling	Extruding Machine or Extruding Gun	Must
6. Tread Application	Building Machine/Tyre builder	Must
7. Assemble the inner tube	Small Tyre Spreader	Must
9. Tyre Carrying	Tyre Conveyor	Must
10. Curing	Segmented Mold/Mould	Must
	Boiler	★★★★★
11. Accessory Machine	Air Compressor	★★★★
	Air Storage	★★★★