




A 18, 5th Floor, Ajanta Complex, Nr. Income Tax, Ashram Road, Ahmedabad 380014..

www.globalventure.hpage.com yoga24in@hotmail.com +91 9033817316

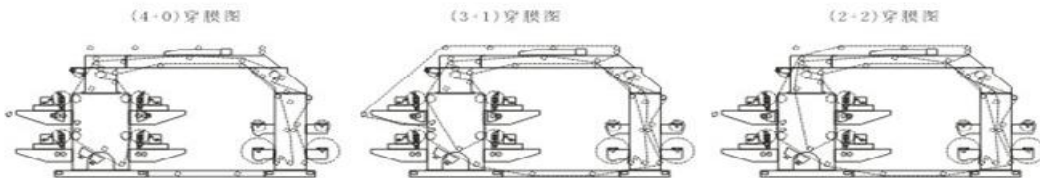

Performance

Introduce sensitization resin as flexible printing plate, suitable for printing such packing materials as polyethylene, polypropylene bag, cellophane and roll paper, etc. It is a kind of ideal printing equipment for producing paper packing bag for food, supermarket handbag, vest bag and clothes bag, etc.

Features

1. Easy operation, flexible starting, accurate color register.
2. The meter counter can set printing quantity according to the requirements. Stop the machine automatically at the quantity or when the material is cut off.
3. Pneumatic printing cylinder lift and lower, it will stir the printing ink automatically after lifting.
4. The printing ink is spread by the anilox cylinder with even ink color.
5. Reliable drying system coordinated with high-speed rotation, it will automatically break circuit when the machine stops.
6. 360° continuous and adjustable longitudinal register device.
7. The frequency control of motor speed adapts to different printing speeds.
8. There are Jogging/Stopping buttons on the plate roller base and material rolling rack so as to make it easy operate the machine when the plate is installed.
9. Magnetic powder brake for unwinding tension control, magnetic powder clutch for rewinding tension control.
10. With double unwinding &rewinding shaft.

Main Technical Parameter

Type	YT-4600 Rs. 11.40 L	YT-4800 Rs. 12.75 L	AYT-41000 Rs. 13.50 L
Max.Effective Printing Width	560mm	760mm	960mm
Max.Web Width	600mm	800mm	1000mm
Max.Printing Speed	50m/min	50m/min	50m/min
Max.Mechanical Speed	60 m/min	60 m/min	60 m/min
Max.Diameter of Roll Material	φ450mm	φ450mm	φ450mm
Internal Diameter of Roll Core	φ76mm	φ76mm	φ76mm
Rang of Repeat Printing Length	191-914mm	191-914mm	191-914mm
Accuracy of Registration	±0.5mm	±0.5mm	±0.5mm
Plate Thickness(Bothside adhesive included)	2.38mm	2.38mm	2.38mm
Heating Power	7Kw	10.5Kw	14Kw
Total Power	11.5Kw	15Kw	18.5Kw
Weight of Machine	3000kg	3500kg	4000kg
Overall Dimension	L4300×W1700×H2500m m	L4300×W1900×H2500m m	L4300×W2100×H2500m m