

Projects
Purchase sales
Turnkey Demand

USA
UK
CHINA

Industrial
Commercial
Home appliances

Import
Export
Manufacturing



House of
Global Venture Impex
采购 | 销售 | 制造商



A 18, 5TH FL, AJANTA COMPLEX, NR. INCOME TAX, ASHRAM ROAD, AHMEDABAD 380014.
www.globalventure.hpage.com | +91 9033817316 | yoga24in@hotmail.com

Automatic Register Control Rotogravure Machine 8 Colour 35,00,000 INR



Packaging & Delivery

Packaging Details: Damp Proof Packing

Delivery Detail: 30-45 Days after deposit

Specifications


Bopp film Rotogravure Printing Machine

2.pe blown film rotogravure printing line machine

3.reasonable

Product Description

DNAY1100E 8 Colours ARC 1100mm Bopp film Rotogravure Printing Machine
Printing In Life

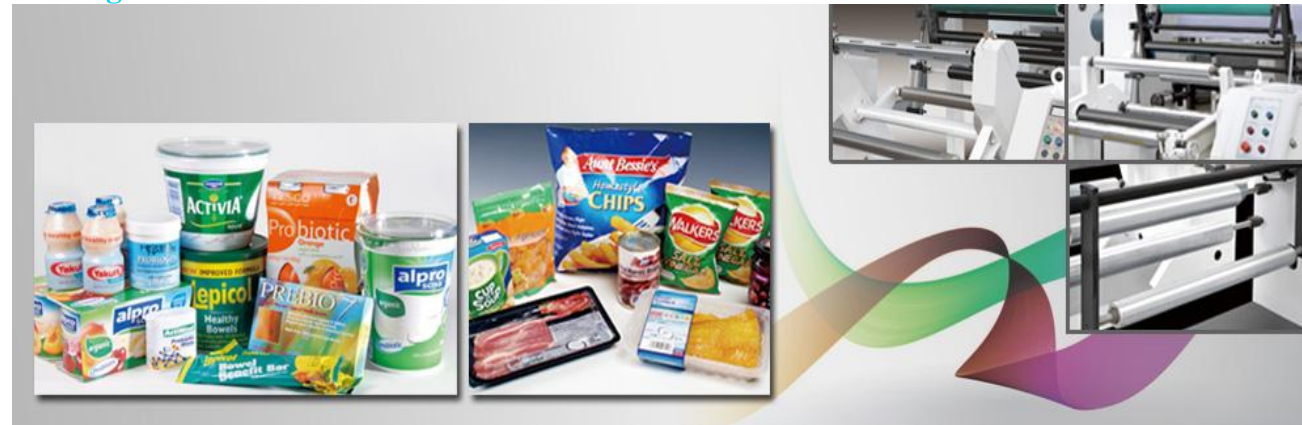

Technical parameter:

Model	DNAY800E Model	DNAY1100E Model
Web width	800mm	1100mm
Printing speed	Max 80-100m/min	Max 80-100m/min
Print cyl. dia.	100-350mm	100-350mm
Rolling material dia.	570mm	570mm
Print cyl. cross adjustable	30mm	30mm
Print cyl. Longitudinal adjustable	100°	100°
Registering accuracy	±0.1mm	±0.1mm
Total power	76kw	89kw
Weight	9000kg	10000kg
Overall dimensions(L×W×H)(mm)	10600×2900×3020	10600×3200×3020

The specification is based on 8 colours

1. Main parameter:

1. Printing colours: 8 colours, 10 units.
2. Max. Width of printing material: 830mm or 1100mm.
3. Max. Printing width: 800mm or 1000mm.
4. Max. Mechanical speed: 120 m/min
5. Max. Printing speed: 100 m/min (varies according to the different printing material ink and the familiarity of the operator, etc.).
6. The Max diameter of unwind and rewind: 600mm.
7. Diameter of printing cylinder: 100mm-350mm
8. Unwinding traction tension: Max 50N/m (Powder brake control)
9. Rewinding tension: Max 25N/m (800 model)
10. Rewinding traction tension: Max 10N/m (Torque motor control)
11. Register precision: Vertical ±0.1mm.
12. Main motor: Frequency motor 7.5KW
13. Heating type: Electric heating
14. Heating power: Each color 12KW
15. Machine power: Max 127kw(It's the power when we start the machine, when it running, the power will be around 76-90kw)
16. Air supply: 1MPa and 0.8MPa dry compressed air (compressor 2 pieces)
- 17 Overall dimension: 10600*2900*3020 mm(800 model)
- 18 Net weights: 11000kg
- 19 Printing material available:
 - 2 PET: 12-100µm
 - 2 PE: 35-100µm
 - 2 BOPP: 15-100 µm
 - 2 CPP: 20-100 µm
 - 2 PVC:20-100µm

Note: And other film materials with the similar printing performance listed above.

Details of Rotogravure printing machine :











● 打印 ● 首色 ● 参数退

● 上电眼

● 下电眼

● 色标区



● 修正

● 自动

● 通信

色标记忆

自动/手动



光电子® ARC-105





德光

Computerized Register Rotogravure Printing Machine
— 凹版电脑套色彩印机 —

气压调节
PRESSURE ADJUST

引入按钮
INTRODUCTION BUTTON

气压调节
PRESSURE ADJUST



启动按钮
START BUTTON

停止按钮
STOP BUTTON

引入按钮
INTRODUCTION BUTTON

故障指示
FAULT INDICATOR



急停按钮
EMERGENCY STOP BUTTON

停止按钮
STOP BUTTON

启动按钮
START BUTTON

牵引按钮
TRACTION BUTTON



德光

地址：浙江省德安县上塘街道东兴路501号
ADD: 511 071, 501 Shangtang Road, Shangtang Street, De'an, Zhejiang, China
TEL: 0577-85512888

